

HIGH PERFORMANCE 5 Stage quick change filter RO System

Experience cleaner, better-tasting water with this high-performance 5-stage reverse osmosis filtration system, enhanced with a dedicated mineral filter.

Designed for convenience, the system features easy, tool-free cartridge changes, making routine filter replacement quick and hassle-free. It effectively filters impurities while adding minerals back into the water for a refreshing, great-tasting result.

Enjoy clean, fresh-tasting drinking water straight from your kitchen tap—without the need for bottled water.



REMOVES
HARMFUL
CONTAMINANTS



EASY, TOOL-FREE
CARTRIDGE
CHANGES



CLEAN,
GREAT TASTING
WATER



IDEAL FOR
HOME USE



*A
Healthier Choice
for Your Home*



PURE
TASTING WATER



BETTER
FOR YOUR FAMILY



REDUCE
PLASTIC WASTE



FRESH
ON TAP



1300 541 644



sales@distillo.com.au



www.distillo.com.au



SCAN TO
LEARN MORE

Quality Filtration for a Cleaner, Brighter Tomorrow

5 STAGE FILTRATION PROCESS

1



PP SEDIMENT FILTER
Removes dirt, sand, rust and other sediments.

2



GAC GRANULAR ACTIVATED CARBON
Reduces chlorine, chemicals and unpleasant tastes and odours.

3



CTO CARBON BLOCK
Further removes chlorine, chemicals and fine impurities.

4




RO REVERSE OSMOSIS MEMBRANE
Filters down to 0.0001 micron, removing heavy metals, bacteria, viruses and dissolved solids.

5



MINERAL FILTER
Adds essential minerals back into the water for great-tasting, refreshing water.

FILTRATION PERFORMANCE

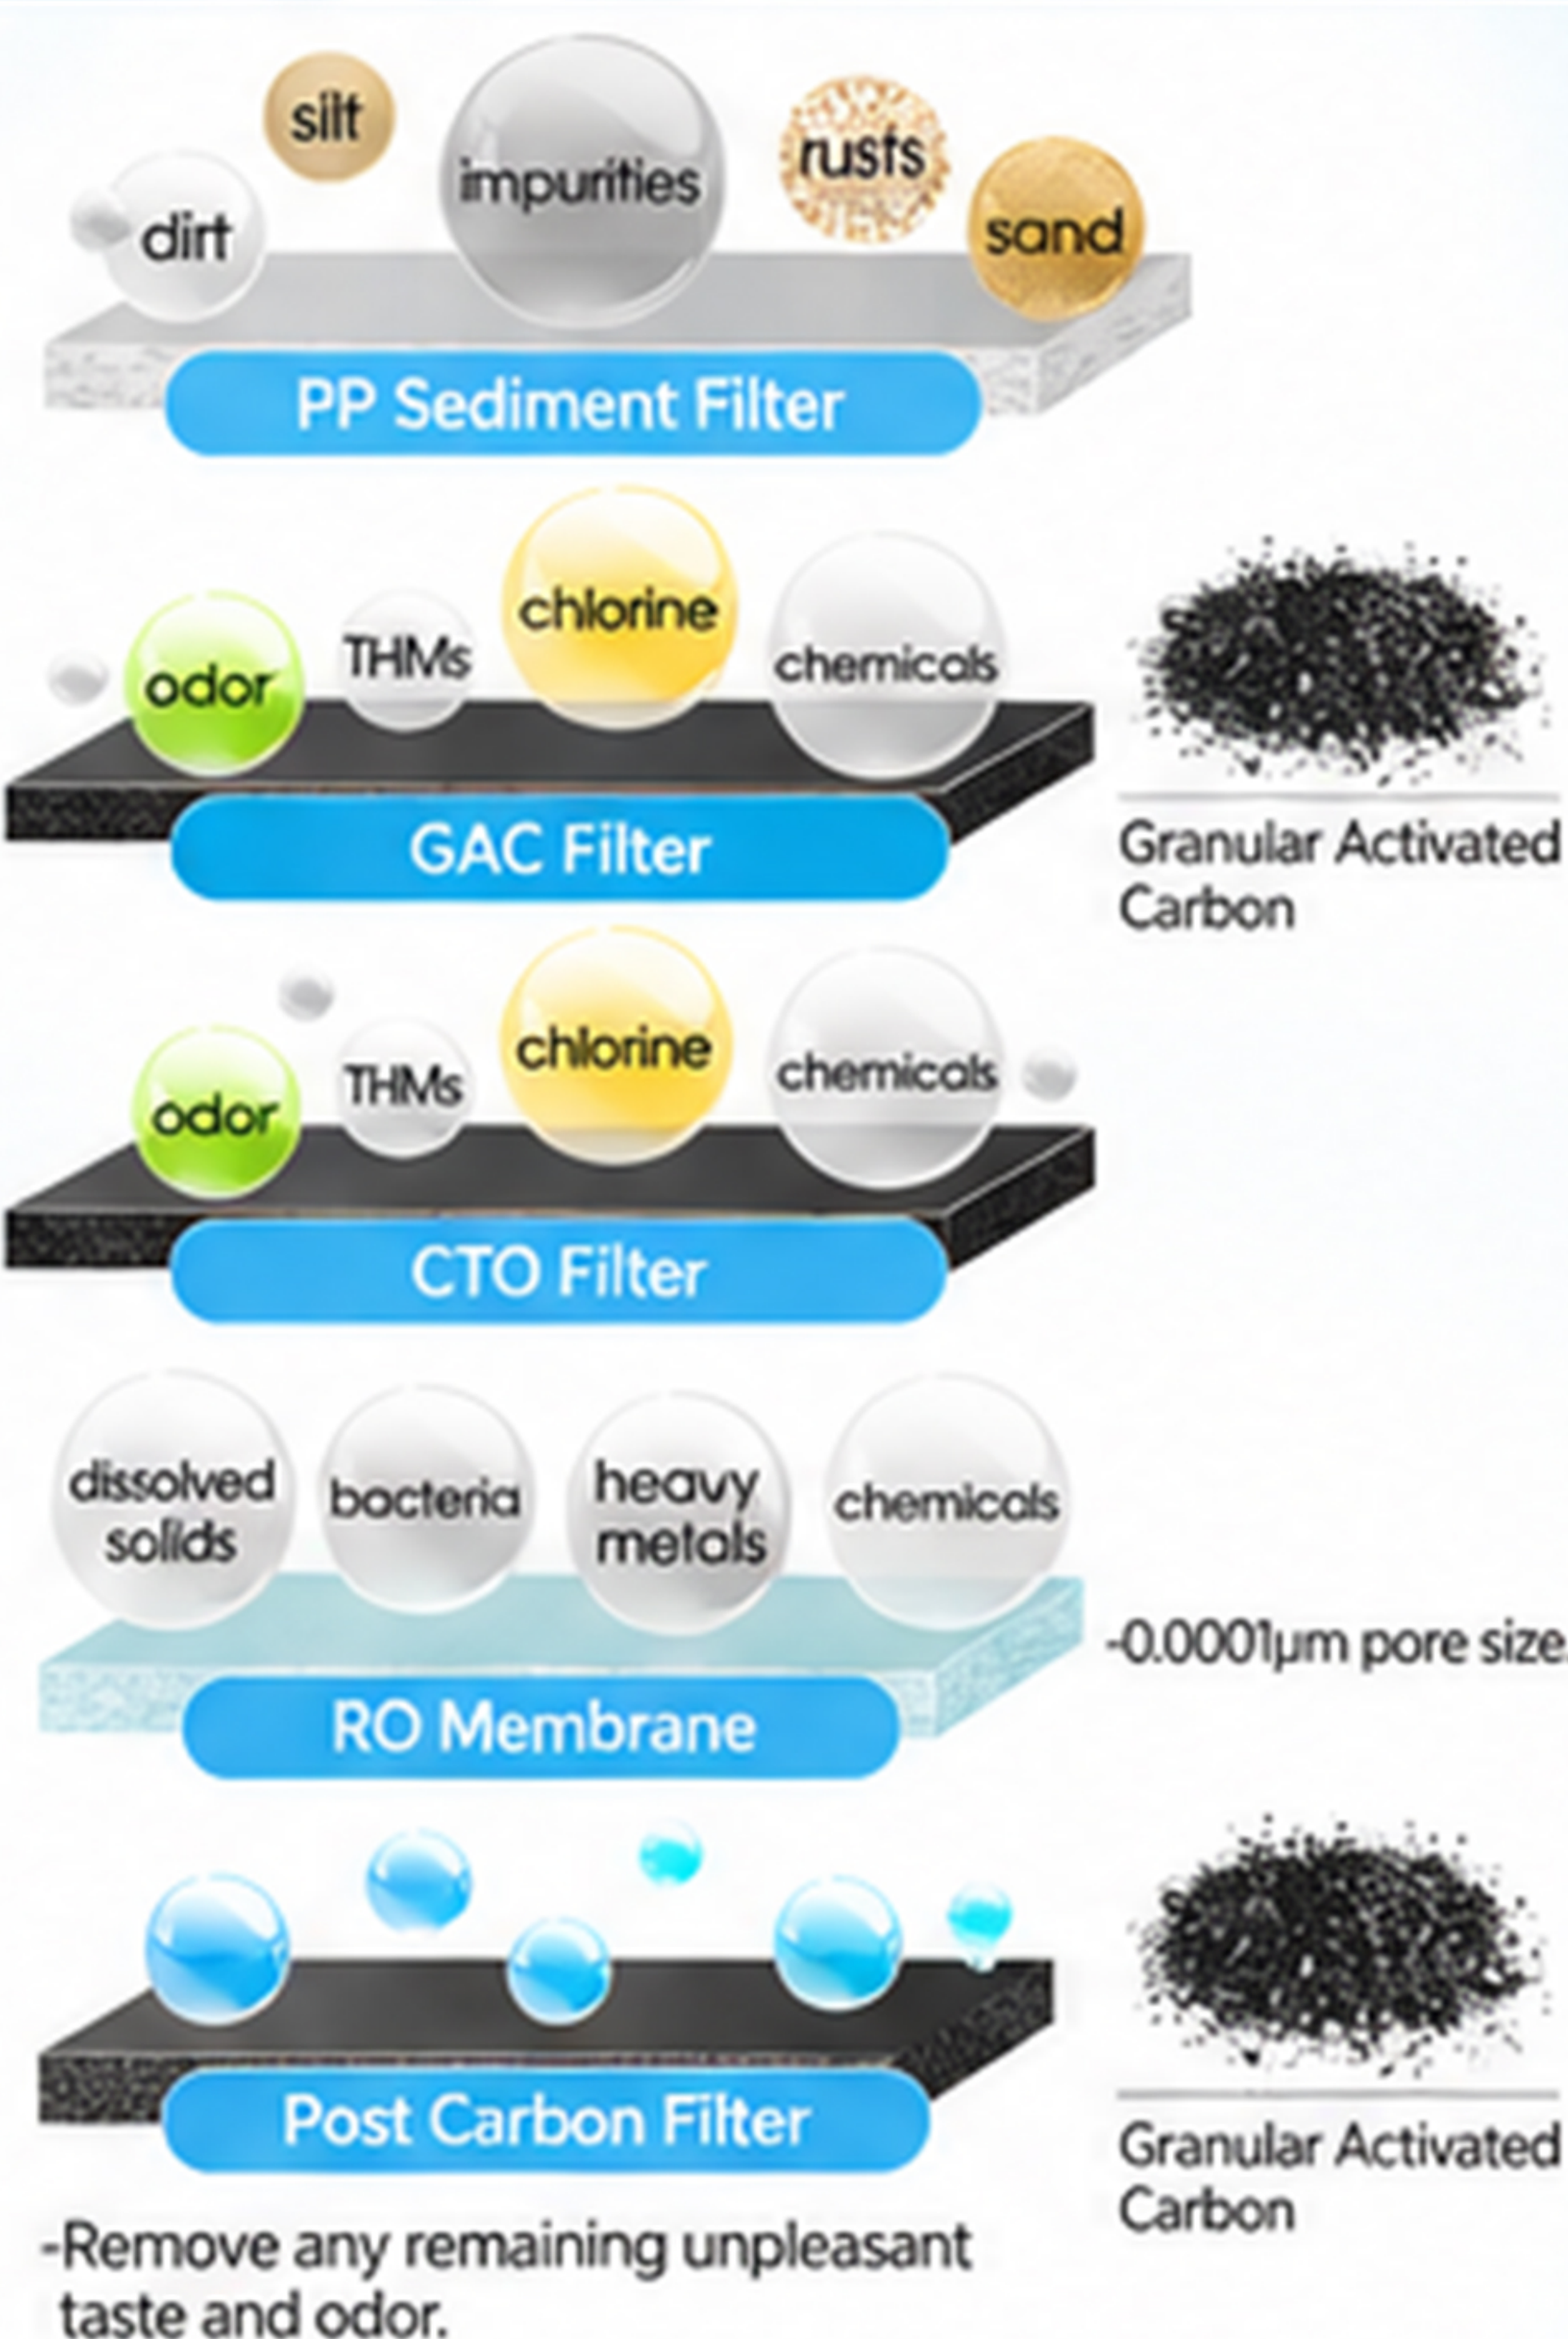

3 Seconds Change Filter


Just Twist and Change



PRODUCT SPECIFICATIONS

Model no.	LSRO-EQ5AN Quick-Change Filter RO System
5 Stage Filter 10" Quick-change Filter (includes RO membrane)	1st Stage: SuPP Sediment Filter 2nd Stage: GAC Carbon Filter 3rd Stage: CTO Carbon Block Filter 4th Stage: SOGPO RO Membrane Filter 5th Stage: Post Carbon & Mineral Filter
Production	Standard: SOGPO (189 Liters per day) (75GPD or 100GPD is available)
Faucet	Elegant Faucet
Pressure Tank	NSF Approved Storage Tank, 4.8 Gallon (RO-132)
Voltage	Input: 100V-240V AC ; Output: 24VDC

COMPONENT LIST

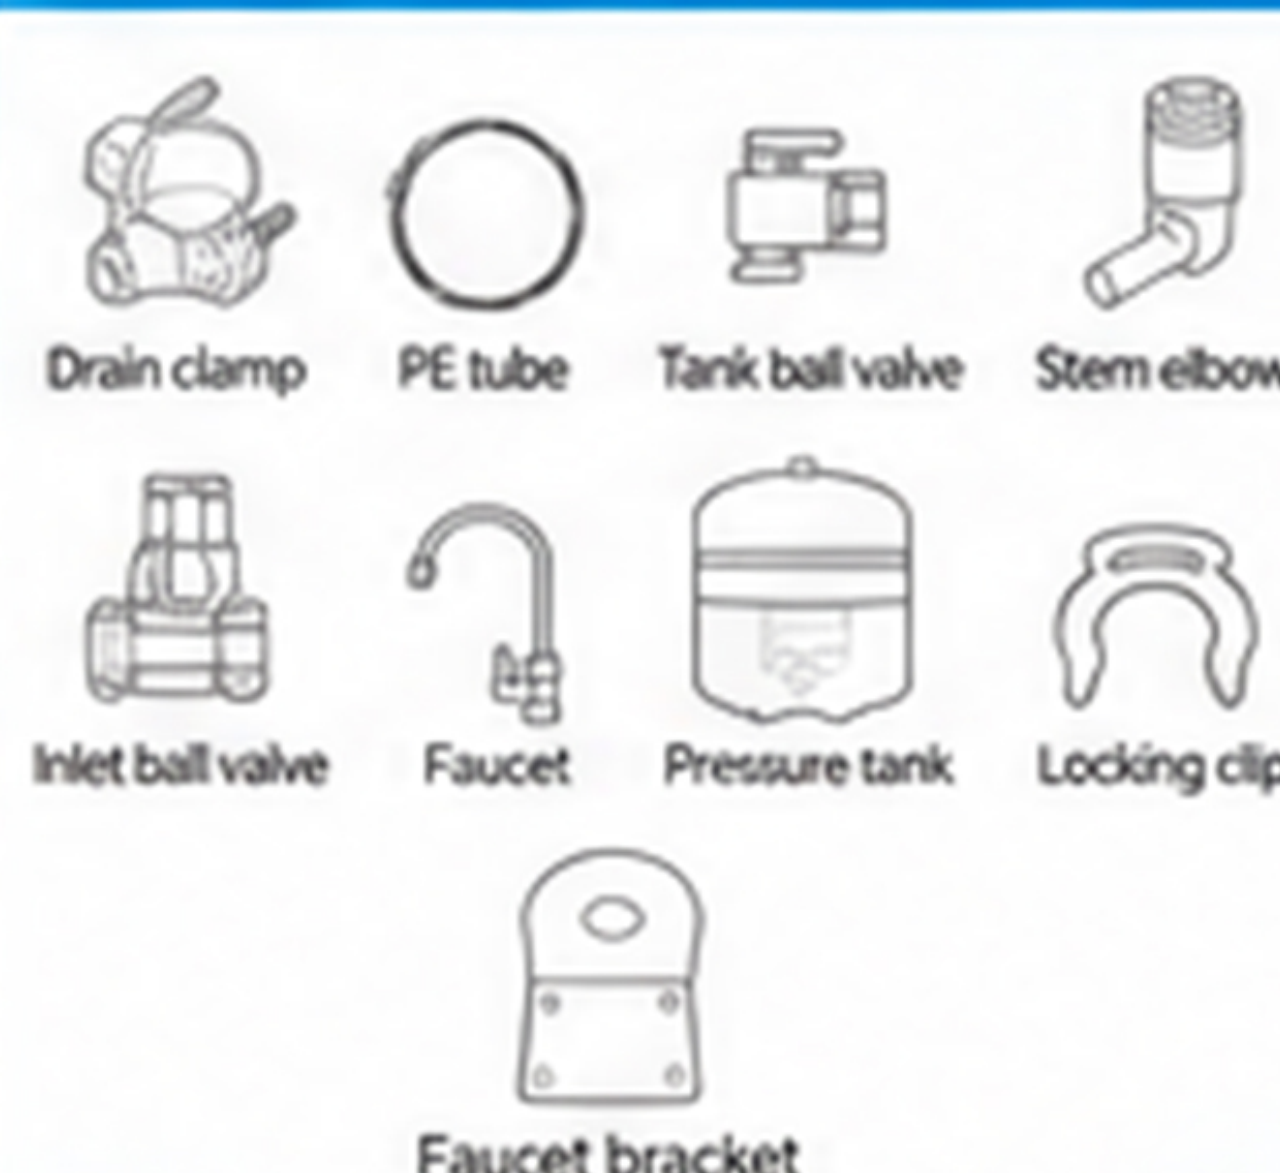

Cleaner Healthier Brighter



1300 541 644



sales@distillo.com.au



www.distillo.com.au